The Scientific Journal of University of Benghazi

http://journals.uob.edu.ly/sjuob

Estimation of the Sodium Adsorption Ratio (SAR) and SAR-Adjusted Ratio of groundwater in Siret Najem of Kuwayfiyah- North Libya

Idris Basher Imneisi [1*]

1 Department of Plant Production, Faculty of Agriculture, Benghazi University-Libya.

Received 20 / 09 / 2022; Accepted 05 / 11 / 2022

الملخص

تقع منطقة الكويفية شمال شرق بنغازي، ليبيا .تضم بعض المناطق الزراعية. في هذه الدراسة جرت محاولة لتقييم جودة مياه الري في سيرة نجم من خلال جمع وتحديد عينات المياه لتمثيل منطقة الدراسة من 3 محطات رئيسية خلال شهر مايو2022. خصائص الجودة التي تم فحصها في هذه الدراسة هي :إجمالي الأملاح الذائبة (TDS) ودرجة الحموضة والتوصيلية والأيونات الموجبة (K^+ ,Na^+ ,Mg^{2+} Ca^{2+}) والأيونات السالبة (HCO_3, Cl^- ,SO_4, CO_3) لتقدير مؤشر امتصاص الصوديوم (SAR) والصوديوم مؤشر الامتزاز (معدل) .أظهرت النتائج في منطقة الدراسة انخفاضًا في مخاطر الصوديوم باستخدام كل من مؤشر امتصاص الصوديوم (SAR) ومؤشر امتصاص الصوديوم المعدل حيث كانت (4.54، 5.167) على التوالي .ومع ذلك، فقد لوحظ أن بعض عينات المياه الجوفية ذات نوعية جيدة للري في منطقة الدراسة.

الكلمات المفتاحية: معدل امتصاص الصوديوم (المعدل)، سيرة نجم، الكويفية.

Abstract

The Kuwayfiyah district is located northeast of Benghazi, Libya. It includes some agricultural areas. In this study, an attempt was made to assess the quality of irrigation water in Siret Najem by collecting and identifying water samples to represent the study area from 3 main stations during the month of May 2022. The quality characteristics that were examined in this study were: Total Dissolved Salts (TDS), pH, conductivity, positive ions (K^+, Na^+, Mg^{2+}, Ca^{2+}), and negative ions (HCO_3, Cl^-, SO_4, and CO_3) to estimate the sodium adsorption index (SAR) and the sodium adsorption index (Adjusted). The results in the study area showed a reduced risk of sodium using both the sodium adsorption index (SAR) and the Adjusted sodium absorption index as they were (5.167, 4.54), respectively. However, some of the groundwater samples were observed to be of good quality for irrigation in the study area.

Keywords: SAR- adjusted, Siret Najem, Kuwayfiyah.

1. INTRODUCTION

Groundwater is the main supply of water for domestic, agricultural, and industrial sectors in many countries. Approximately one-third of the world's population obtains consuming water from groundwater [1]. The type of surface water and groundwater is dependent on a number of things, e.g. geological, biological, meteorological, hydrological, and topographical factors such as minerals, temperature, duration of contact with minerals, water-soluble carbon dioxide, etc. That being the case, any change and conversion of water when it infiltrates the ground is unavoidable as it frames one of the stages to improve groundwater quality [2]. Salts found in irrigation water can affect both soil structure and crop yield [3,4,5]. The irrigation water quality is generally specified by its salt content, bicarbonate concentration, and the presence of potentially toxic elements. Irrigation water can also contain ratable amounts of nutrients that should be factored into the overall nutrient management plan [6]. Irrigated agriculture is based on an adequate water supply of usable quality. irrigation water evaluation, emphasis is placed on the chemical and physical characteristics of the water, and any other important factors. Sodium absorption ratio (SAR) is the most serious Salinity indices that are considered for determining the suitability of irrigation water according to [7].

The sodium adsorption ratio (SAR) is often utilized as an index for assessing the sodium endanger related to an irrigation water supply. SAR ratio for soil extracts and irrigation waters is utilized to state the relative activity of sodium ions in swap reactions with soil [7,8]. Sodium can additionally have an effect on crop growth not directly through inflicting nutritional imbalances and by degrading the physical situation of the soil. High sodium levels can reason calcium, potassium, and magnesium deficiencies — and high sodium levels relative to calcium concentrations can severely minimize the price at which water infiltrates the soil, which can affect the plant due to the fact of terrible aeration [9]. The Benghazi Plain is mainly covered by limestone, and partly covered with red clay, sand, and gravel deposits. Karst (dissolution) features are prominent in this area, and dissolution channels may exist at some depth below sea level [10]. Here an attempt has been made to assess the irrigation water quality of Siret Najem in Kuwayfiyah - North Libya, which includes several underground wells used for drinking and agricultural activities. In the evaluation of irrigation water, emphasis is placed on the chemical and physical properties of the water as follows: total dissolved salts (T.D.S), pH, electrical conductivity, positive ions (K^+, Na^+, Mg^{2+}, Ca^{2+}), negative ions (HCO_3, Cl^-, SO_4^{-2}, and CO_3^{-2}), to calculate the Sodium adsorption ratio (SAR) and SAR-adjusted index.

*__Correspondence__: Idris Basher Imneisi
idris.imneisi@uob.edu.ly

©2022 University of Benghazi. All rights reserved. ISSN:Online 2790-1637, Print 2790-1629; National Library of Libya, Legal number : 154/2018

2. MATERIAL AND METHODOLOGY

2.1. The Study Area.

Siret Najem is located in the Kuwayfiyah area in Northeastern Libya. It is around 15km east of Benghazi and about 103 meters above sea level. Groundwater is considered the main source of water supply in the study area. Three governmental wells in the Siret Najem area feed the Kuwayfiyah area with drinking water and irrigation. They have been approved as the main sampling points to represent the study area. Table 1 shows the coordinates of water samples and location names. While figure 1. Shows the geological map of the study area.

Table 1 shows the coordination of the sampling site

N	Name	N	E
Station 1	Governmental well No. 1	32.16.5734	20.26.8160
Station 2	Governmental well No. 2	32.16.2537	20.27.2403
Station 3	Governmental well No. 3	32.16.1340	20.27.5080

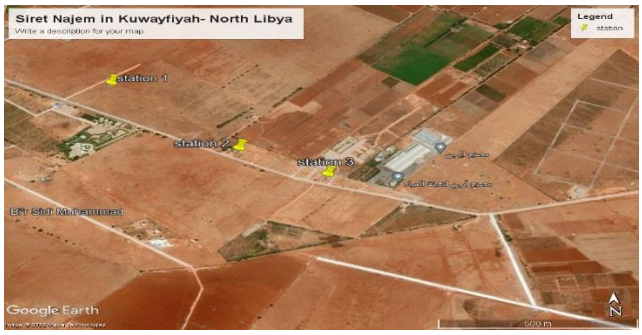


Figure 1 shows the study area and the sampling points in Siret Najem

2.2. Sampling and Analysis.

The study was conducted during the summer season of 2022 to study groundwater quality(water well) in Siret Najem in the Kuwayfiyah area to explain its suitability for agricultural exploitation in the region. The study included three sites in Siret Najem to assess the validity of irrigation. The pH, Electrical conductivity (EC) and temperature (T) were measured locally by (Multifunction Portable pH, Conductivity, and temperature) field instruments (water quality tester Company). The positive ions (K^+, Na^+, Mg^{2+}, Ca^{2+}), and negative ions (HCO_3, Cl^-, SO_4) and CO_3 were determined using a HACH-DR 3900 UV-Vis Spectrophotometer using standard methods given by the American Public Health Association[11] at the laboratory of agriculture faculty at Benghazi university. These data were used to compute SAR and the Adjusted SAR Index.

2.3. Computational Technique.

The SAR procedure includes infiltration problems due to an excess of sodium with calcium and magnesium. It does not take into account changes in calcium in the soil water that take place because of changes in the solubility of calcium resulting from precipitation or dissolution during or following irrigation [5]. According to Suarez[12] the SAR adjusted calculation included five main steps. In this study, it will be calculated according to these steps. Lesch[8] and Suarez[12] describes how to compute the adjusted SAR by utilizing the step-by-step technique to calculate the adjusted SAR as**:**

2.3.1. **Step 1**: the cation and anion measurements were in mg/L units; these values can be converted to meq/L units using the atomic weight and valence conversion factors shown in table 2.

Table 2. Atomic weights, valence numbers, and conversion factors for common ions

Ion	Element	Atomic Weight (AW)	Valence (V)
Na^+	Sodium	22.99	1
Ca^{2+}	Calcium	40.08	2
Mg^{2+}	Magnesium	24.31	2
Cl^-	Chloride	35.45	1
$SO4^{2-}$	Sulfate	96.06	2
HCO_3^-	Bicarbonate	61.02	1

2.3.2. Step 2: Calculate the sum of cations (SC) and ionic strength (IS) as:

$$Sc = Na + Ca + Mg \quad \ldots\ldots\ldots \quad eq\ (1).$$

$$IS = \frac{(1.3477 * Sc + 0.5355)}{1000} \quad \ldots\ldots. \quad eq\ (2).$$

2.3.3. Step 3: Calculate the log(X) value (using meq/L ion measurements) as:

$$\log x = \frac{1}{3}\left[4.6629 + 0.6103\log(IS) + 0.0844\{(\log Is)^2 + 2\log\frac{Ca}{2HCO3}\right) \ldots\ldots. \text{eq (3).}$$

HCO_3 and Ca represent the bicarbonate and calcium concentrations (in mmol/L) in the irrigation water. Hence, given the HCO_3/Ca ratio and the estimated IS value, Table 3 of (12) Can be conveniently used to determine the approximate X value for input into the equation.

Table 3. Exact versus equation 3 approximated X values (approximations shown in parentheses). (8)

Ionic Strength	HCO_3/Ca Ratio (Mmol/L Basis)		
	0.1	1.0	10.0
0.001	73.4 (73.1)	15.8 (15.8)	3.41 (3.39)
0.010	84.1 (84.5)	18.1 (18.2)	3.90 (3.92)
0.100	112.0 (111.1)	24.1 (23.9)	5.20 (5.16)
0.500	144.0 (145.3)	30.9 (31.3)	6.66 (6.74)

©2022 University of Benghazi. All rights reserved. ISSN:Online 2790-1637, Print 2790-1629; National Library of Libya, Legal number : 154/2018

2.3.4. Step 4: Calculate the equilibrated Ca concentration (on a meq/L unit basis) as:

$$Ca_{eq} = 2 * 10^{logx} * (P_{CO2})^{\frac{1}{3}} \quad \ldots\ldots\ldots \quad eq\ (4)$$

P_{CO2} is the partial CO2 pressure in the near-surface soil, which is assumed to be 0.0007 atm as an average in this zone(the near-surface soil)[8].

2.3.5. Step 5: Calculate the adjusted SAR as

$$\mathrm{SAR_{adj}} = \frac{\mathrm{Na}}{\sqrt{\frac{\mathrm{Ca_{eq}} + \mathrm{Mg}}{2}}} \quad \ldots\ldots \text{ eq } \ldots (5).$$

Table (4) General classifications of irrigation water based on SAR

SAR values	Sodium hazard	Comments
1-9	Low	Use of sodium-sensitive crops must be cautioned.
10-17	Medium	Amendments (such as gypsum) and leaching are needed.
18-25	High	Generally unsuitable for continuous use.
>26	Very High	Generally unsuitable for use

3. RESULTS AND DISCUSSION

3.1. Water Quality Criteria.

Cations such as sodium (Na^+), calcium (Ca^{2+}), magnesium (Mg^{2+}) and the anions such as nitrates (NO_3^-), bicarbonates (HCO_3^-), sulfates (SO_4^{-2}), chlorides (Cl^-) naturally occur in water and are usually determined in water quality evaluation tests. The total dissolved solids are the general nature of the salinity of the water. In all wells, the TDS values ranged from 735 to 905 ppm with an average of 804 ppm (Table 5). The pH in the groundwater varied from 7.79 to 7.8 (Table 5) in all the groundwater samples of the study area and is within the safe limit [13]. The high content of bicarbonate in the irrigation water of 500 mg /l or more may lead to the appearance of iron deficiency in the plant even if it is found in the soil. The results of the chemical analysis of water well samples used for irrigation in the study area showed the concentrations of calcium cations, where the average of those values ranged between (85 – 95 mg/l) The presence of calcium is considered in the range for groundwater, as its sources are varied according to the components of the layers of the earth, and that the increase in its concentrations may be a result of the presence of groundwater in layers. Sodium is an important cation that, in excess, can damage soil structure and reduce crop yields. If the sodium concentration in the irrigation water is high, it is easily absorbed by the clay particles, displacing Mg^{2+} and Ca^{2+} ion [14].

Table 5: Chemical composition of groundwater Siret Najem in the Kuwayfiyah area

Parameter	Station 1	Station 2	Station 3	Mean	Standard of (FAO) Irrigation
Electroconductivity (EC)	1467 µS/cm	1574 µS/cm	1805 µS/cm	1615.3 µS/cm	
Total Dissolved Soiled	735 mg/l	773 mg/l	905 mg/l	804.3 mg/l	0-2000 mg/l
pH	7.79	7.78	7.8	7.79	6.5-8.5
Temperature (C)	26.2 C	27.2 C	26.7 C	26.7 C	-
Total Hardness	365 mg/l	388 mg/l	443 mg/l	398.67 mg/l	-
Ca- Hardness	188 mg/l	205 mg/l	235 mg/l	209.3 mg/l	-
Sodium (Na)	212 mg/l	215 mg/l	212 mg/l	213 mg/l	0-40 meq/l
Calcium (Ca)	85 mg/l	85 mg/l	95 mg/l	88.3 mg/l	0- 20 meq/l
Magnesium (Mg)	46 mg/l	46 mg/l	55 mg/l	49 mg/l	0-5 meq/l
HCO_3	239 mg/l	239 mg/l	243 mg/l	240.3 mg/l	0- 10 meq/l
Chloride (Cl)	317 mg/l	340 mg/l	385 mg/l	347.3 mg/l	0- 30 meq/l
Nitrite (No_2)	1 mg/l	0.5 mg/l	1 mg/l	0.83 mg/l	-
Nitrate (No_3)	2.6 mg/l	1.4 mg/l	1.3 mg/l	1.76 mg/l	0-10 mg/l

©2022 University of Benghazi. All rights reserved. ISSN:Online 2790-1637, Print 2790-1629; National Library of Libya, Legal number : 154/2018

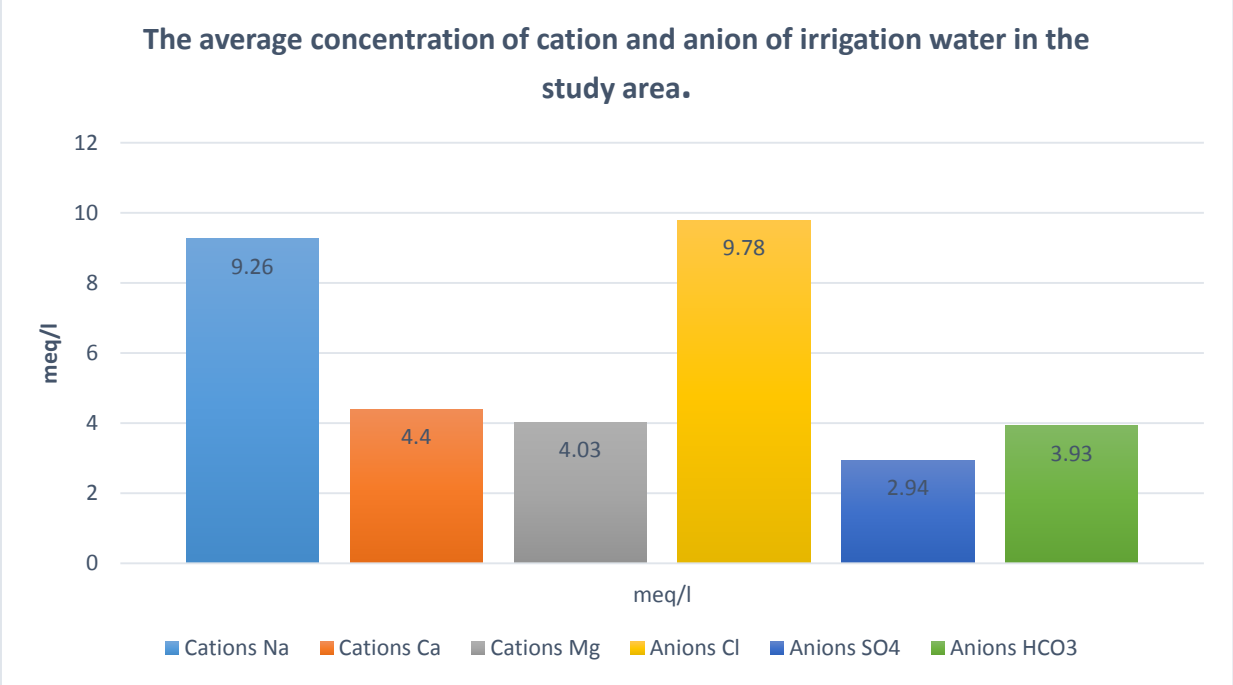


Figure 2: The average concentration of cation and anion of irrigation water in the study area.

3.2. SAR -unadjusted and SAR adjusted.

The sodium adsorption ratio (SAR) is commonly used as an index for evaluating the sodium hazard associated with an irrigation water supply. The sodium hazard is typically expressed as the sodium adsorption ratio (SAR). This index quantifies the proportion of sodium (Na^{+}) to calcium (Ca^{++}) and magnesium (Mg^{++}) ions in a sample. Numerous guidelines for the assessment of the sodium adsorption ratio (SAR) of irrigation water have been published [15] in table (4). The actual values of SAR (irrigation water) were calculated from chemical analysis using the step-by-step procedure to calculate the adjusted SAR [8]. The computed value of SAR -unadjusted is 4.54 for the groundwater collected from the study area. The SAR- adjusted is 5.167 of the groundwater collected from the study area. Table 6 summarizes the results obtained from the process of applying the previous equations.

Table 6: Computed values of SAR, and SAR-adjusted in the study area

	Cations			Anions		
	Na	Ca	Mg	Cl	SO_4	HCO_3
mg/l	212	88.3	49	347.3	141.6	240.3
meq/l	9.26	4.4	4.03	9.78	2.94	3.93
Sum of Cations (SC)	17.69					
Ionic Strength (IS)	0.0243					
log(X) value	1.131					
Ca_{eq}	2.398					
SAR- adjusted	5.167					

4. CONCLUSION.

The results of the chemical analysis of water well samples used for irrigation in the study area showed the measured value of EC varied from 1467 to 1805 µS/cm. The pH in the groundwater varied from 7.79 to 7.8 in all the groundwater samples of the study area and is within the safe limit [5,13]. The average of the values of the concentrations of calcium cations ranged between (85 – 95 mg/l).

The sodium adsorption ratio (SAR) is commonly used as an index for evaluating the sodium hazard associated with an irrigation water supply. The computed value of SAR -unadjusted is 4.54 for the groundwater collected from the study

©2022 University of Benghazi. All rights reserved. ISSN:Online 2790-1637, Print 2790-1629; National Library of Libya, Legal number : 154/2018

area. The SAR- adjusted is 5.167 of the groundwater collected from the study area. They are located in a low sodium hazard area by using both the adjusted SAR and SAR.

The results of the chemical analyses showed that the groundwater is generally of a chemical quality suitable for agricultural use. All groundwater samples were observed to be of good quality for irrigation in the study area. The soil receiving this water is not particularly susceptible to developing sodicity-related problems. Agricultural systems must be monitored in terms of the quality of irrigation methods to ensure the least use of water and the greatest return on production to protect the soil from excessive water.

5. RECOMMENDATIONS.

In the future, there should be a detailed monitoring of groundwater quality in Siret Najem of Kuwayfiyah; this should be given the main priority of using the microbiological parameters with physic-chemical parameters in irrigation water quality index (IWQI) calculations.

6. REFERENCES.

1. Khosravi H, Karimi K, Nakhaee Nezhad, Fard S, and Mesbahzadeh T. Investigation of Spatial Structure of Groundwater Quality Using Geostatistical Approach in Mehran Plain, Iran Pollution,2(1), 57-65 https://doiorg/107508/pj201601006. 2016.

2. Khatri N, Tyagi S. Influences of natural and anthropogenic factors on surface and groundwater quality in rural and urban areas. Frontiers in Life Science. 2014;8(1):23-39.

3. Imneisi I, Aydin M. Assessment of Ground Water for Irrigation Use of Side-Mansur Area in Benghazi Region. . 1st International Forestry and Nature Tourism Congress 2020, Kastamonu/Turkey: Kastamonu Univ., Journal of Forestry Faculty; 2020.

4. Li P, Hui Qian JW. Hydrogeochemistry and quality assessment of shallow groundwater in the southern part of the Yellow River alluvial plain (Zhongwei section), Northwest China. Earth Sciences Research Journal. 2014;18(1):27-38.

5. Ayers RS, Westcot DW. Water quality for agriculture: Food and Agriculture Organization of the United Nations Rome; 1985.

6. EPA. National Management Measures to Control Nonpoint Pollution from Agriculture chapter 4F: Irrigation Water Management Pages(157-202) - US Environmental Protection Agency Office of Water (4503T) 1200 Pennsylvania Avenue, NW Washington, DC 20460. 2003.

7. Wilcox LV. Classification and Use of Irrigation Waters. United States, Department of Agriculture. Washington, DC number 969. 1955.

8. S. M. Lesch DLS. A short note on calculating the adjusted SAR index. American Society of Agricultural and Biological Engineers ISSN 0001-2351Vol 52 (2): 493-496. 2009.

9. Hanson BR. Agricultural Salinity and Drainage. Published in the United States of America by the Department of Land, Air and Water Resources, University of California, Davis, California 95616. 2006.

10. Dotel. W. W., Maouire F. J. Ground-water resources of the Bengasi area, Cyrenaica, United Kingdom of Libya. Prepared under the auspices of the United States Operations Mission to Libya, the United States Corps of Engineers, and the Government of Libya (United States Government Printing Office, Washington). 1964.

11. APHA. Standard Methods for the Examination of Water and Wastewater. © Copyright 1999 by American Public Health Association, American Water Works Association, Water Environment Federation. 1999.

12. Suarez DL. Relation Between pHc and Sodium Adsorption Ratio (SAR) and an Alternative Method of Estimating SAR of Soil or Drainage Waters. Soil Sci Soc Am J 45:469-475. 1981.

13. WHO. Guidelines for drinking-water quality 2011.104-8 p.

14. A. Narsimha, V. Sudarshan, P. Srinivasulu, B. Vishnu, Kumar MR, Kumar SN. Groundwater Quality and its Suitability for Drinking and Agricultural Purpose around Chityal Area, Nalgonda District, Andhra Pradesh, India. water research and development ISSN: 2249-2003]. 2012;Vol. 2 | No.3 | 68-75

15. Wilcox, L. W., Leajwb, G. A. Pearson, H. E. Hayward L. A., Richards, L., Bernstein M., Fireman, C. A., Bower J. T., Hatcher, R. C. Reeve. Diagnosis_and_Improvement_of_Saline_and alkali soil. Agriculture Handbook No 60 Issued United States Department of Agriculture. https://booksgooglecom. 1954.

©2022 University of Benghazi. All rights reserved. ISSN:Online 2790-1637, Print 2790-1629; National Library of Libya, Legal number : 154/2018